





GG-75

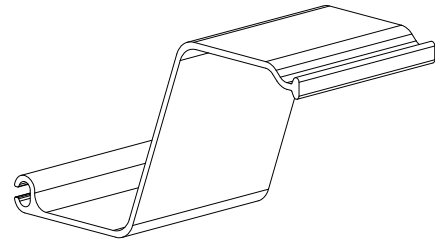

Drawn: JAB Date: 06/18/09

Allowable Moment (M)	31,667 ft-lb/ft	140.85 kN-m/m
Section Modulus (Z)	38.0 in ³ /ft	2,043 cm ³ /m
Moment of Inertia (I)	266 in ⁴ /ft	36,325 cm ⁴ /m
Thickness (t)	0.400/0.430 in	10.2/10.9 mm
Section Depth	14 in	356 mm
Section Width	24 in	610 mm
Material	Ultracomposite FRP	
Standard Colors	Charcoal	
Profile/Patented Features	Z Profile	

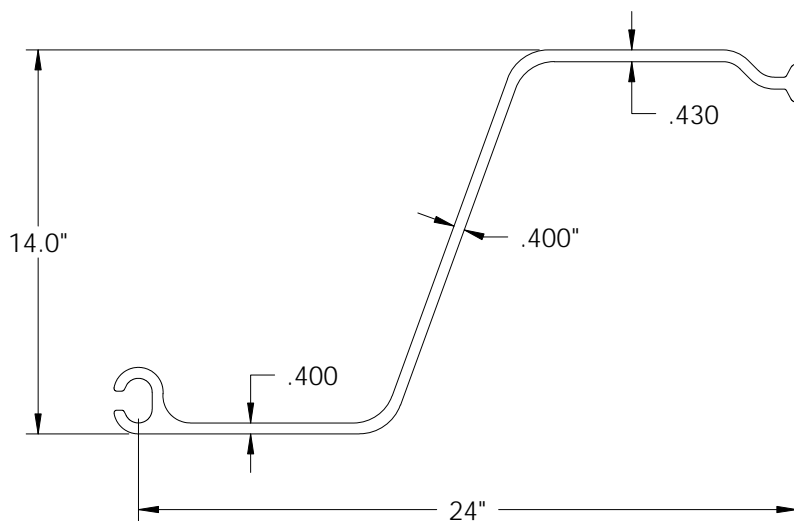

Physical properties are defined by ASTM testing standards, The Aluminum Association Design Manual, and/or standard engineering practice. The values shown are nominal and may vary. The information found in this document is believed to be true and accurate. No warranties of any kind are made as to the suitability of any CMI product for particular applications or the results obtained there from. ShoreGuard, C-Loc, TimberGuard, GeoGuard, Dura Dock, Shore-All, and Gator Gates are registered trademarks of Crane Materials International. ArmorWare, Ultra Composite, GatorDocks, GatorBridge and CMI Waterfront Solutions are trademarks of Crane Materials International. United States and International Patent numbers 5,145,287; 6,000,883; 6,033,155; 6,053,666; D420,154; 6,575,667; 7,059,807; 7,056,066; 7,025,539; 7,393,482; Other patents pending. © 2009 Crane Materials International. All Rights Reserved.