





# GG-95

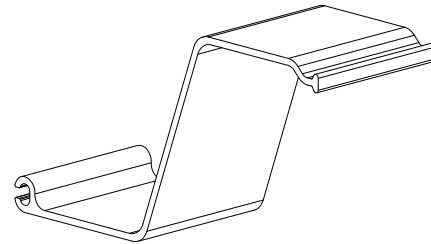

Drawn: JAB

Date: 06/18/09

<b>Allowable Moment (M)</b>	48,750 ft-lb/ft	216.84 kN-m/m
<b>Section Modulus (Z)</b>	58.5 in <sup>3</sup> /ft	3,145 cm <sup>3</sup> /m
<b>Moment of Inertia (I)</b>	497 in <sup>4</sup> /ft	67,870 cm <sup>4</sup> /m
<b>Thickness (t)</b>	0.540 in	13.7 mm
<b>Section Depth</b>	17 in	432 mm
<b>Section Width</b>	30 in	762 mm
<b>Material</b>	Ultracomposite FRP	
<b>Standard Colors</b>	Charcoal	
<b>Profile/Patented Features</b>	Z Profile	

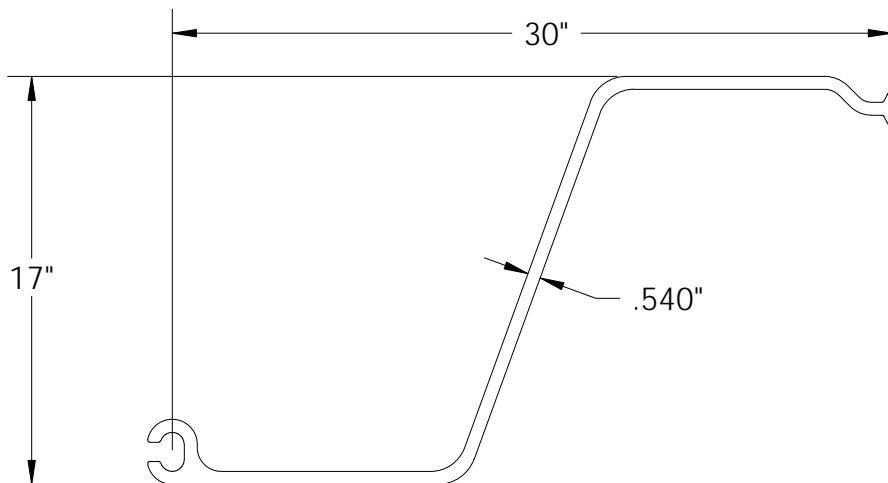

Physical properties are defined by ASTM testing standards, The Aluminum Association Design Manual, and/or standard engineering practice. The values shown are nominal and may vary. The information found in this document is believed to be true and accurate. No warranties of any kind are made as to the suitability of any CMI product for particular applications or the results obtained there from. ShoreGuard, C-Loc, TimberGuard, GeoGuard, Dura Dock, Shore-All, and Gator Gates are registered trademarks of Crane Materials International. ArmorWare, Ultra Composite, GatorDocks, GatorBridge and CMI Waterfront Solutions are trademarks of Crane Materials International. United States and International Patent numbers 5,145,287; 6,000,883; 6,033,155; 6,053,666; D420,154; 6,575,667; 7,059,807; 7,056,066; 7,025,539; 7,393,482; Other patents pending. © 2009 Crane Materials International. All Rights Reserved.